


# TAI-Universal

Multiple Slew-Drive Single-Axis  
Independent Tracking System—2P

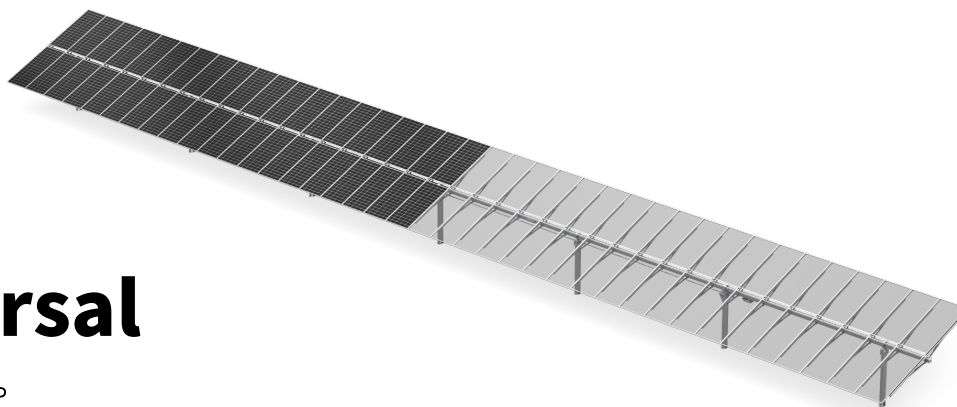

# TAI- Universal

Multiple Slew-Drive Single-Axis  
Independent Tracking System—2P

## DESIGN SPECIFICATION

<b>Tracking Type</b>	Horizontal Single-Axis 2 Modules-in-Portrait Tracker Synchronous Multi-
<b>Drive Type</b>	Point Slew drive
<b>Motor Type</b>	24V DC Motor
<b>String Voltage</b>	1000 V or 1500 V (DC)
<b>Tracker Length</b>	Up to 70m
<b>Tracker Configuration</b>	4 of 1500V Strings
<b>Module Number</b>	90 -120 modules, depending on module size
<b>Ground Coverage Ratio (GCR)</b>	25%-45% (Typical)
<b>Modules Support</b>	All Commercial Modules (210/182/166)
<b>Stow Position</b>	0°
<b>Tracker Rotation Range</b>	±60° ( ±50° Optional)
<b>Operating Temperature Range</b>	-30 °C to 60°C
<b>Foundation Type</b>	Driven Pile / Concrete / PHC/Ramming
<b>Materials</b>	Pre-Galvanized/Hot-dipped Galvanized/Magnesium Zinc Coated Steel
<b>Allowable Wind Speed</b>	Up to 55 m/s per ASCE 7-10
<b>Onsite Training</b>	Included
<b>Installation requirement</b>	No special tools required
<b>Slope Tolerances</b>	North-South 11° (20%)
<b>Warranty</b>	10 year Drive and Control, 15 year Structure

## ELETRONICS AND CONTROLS

<b>Control System</b>	1 controller per tracker
<b>Power Supply</b>	300-1500VDC String Powered, 90-264VAC Powered, Backup lithium battery
<b>Solar Tracking Algorithm</b>	Astronomical Algorithms+Intelligent Algorithms
<b>Controller Energy Consumption</b>	≤0.1 kWh/Day
<b>Tracking Accuracy</b>	±2°
<b>Communications</b>	Zigbee/Lora Wireless Mesh Network/ Ethernet or RS485 Cable
<b>Nighttime Stow</b>	Yes
<b>Backtracking</b>	Yes
<b>Certifications</b>	UL 3703 / CE / UL 2703 (pending)/IEC 62817